


Marching Bib/Pants Alteration Instructions

PLEASE TAKE THIS PAGE TO THE TAILOR WITH YOUR PANTS!!!

- No excess fabric may be cut off of the pants
- Hems should reach the second eyelet on the marching shoe in the front and ½ inch below the top at the heel of the shoe
- *There should be **NO BREAK** in the pants. This means the pants will not touch the shoe, crease, or “puddle” on the shoe*

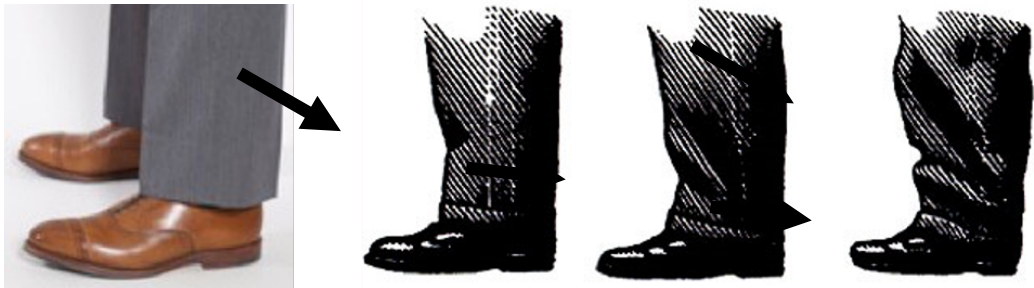

YES!! **no** **No** **No**

- Do Not attach hem tape or other fabric to the pants
- Hem must be hand stitched in order to protect the material with repeated use. (A whip stitch is most commonly used)
- Fold only one time if necessary. Multiple folds bunch up the bottom of the pant leg and make the pant leg fall incorrectly
- You can take out the side seam as the pants are tapered in order to make the pant leg fall correctly. If this is done, please make sure the side seam is stitched closed at the folded edge
- Foot Elastic – Stitch the elastic 2” above the base of the hem line on the inside of the pant leg. Bring **BLACK** elastic under the student’s foot and secure on the other side. The elastic should be taut and hold the pant legs securely straight
- When fitted properly there should not be a break in the pant legs
- **Uniforms must always be transported in garment bags**

These tailors have worked with our students before; you are not required to use them. Please have your marcher try on their hemmed pants before you leave the tailor. If they are not correct you will be responsible for getting them fixed.

Tran Tailor

Ann Nguyen
281-367-6532
25119-E Grogans Mill
Near Starbucks and Shipley Donuts

Hylai Tailor

8021 Research Forest, Suite E
The Woodlands, TX 77382
281-298-3604
On the S side of Research Forest near Dosey Doe across from Alden Bridge Village Center